



RGB 激光器 FAC 加工



TO9



TO56





高温光斑不漂移、偏转

高温光斑不衰减

旋转镀膜，低杂散光

光斑形状可定制



支持定制不同准直镜筒

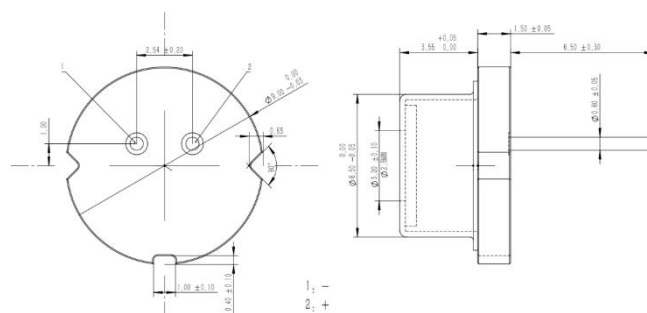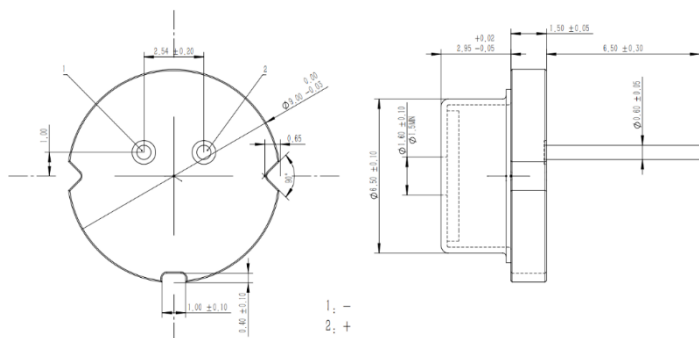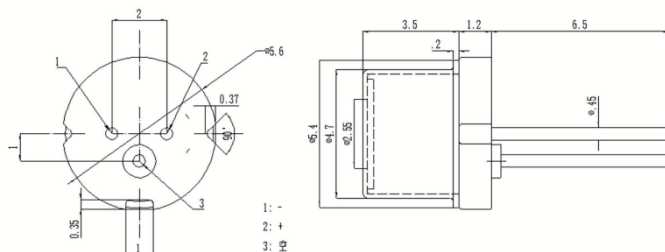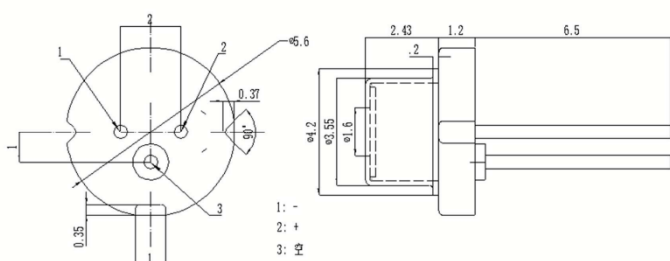

不同封装尺寸

典型性能 (20°C)

项目	技术参数		
颜色	R	G	B
波长	638nm	525nm	455nm
电压	1.9V-2.6V	4.0V-5.5V	3.5V-4.7V
电流	0.65A	1.9A	3.0A
输出功率	0.5W	1.5W	5W
出口光斑尺寸	0.35×0.3mm	0.25×0.2mm	0.25×0.2mm
出口 1.5m 光斑尺寸	35×380mm	25×260mm	25×260mm
T0 管帽尺寸	T056、T052 可选	T09 (高度 2.95mm、3.55mm、4.50mm 可选)	

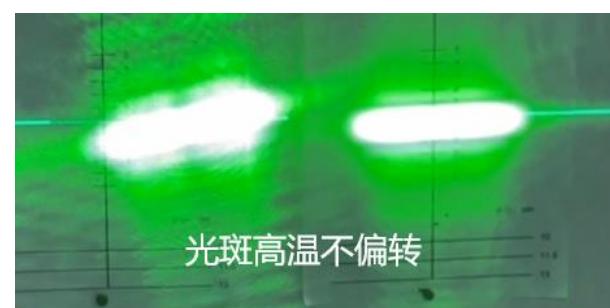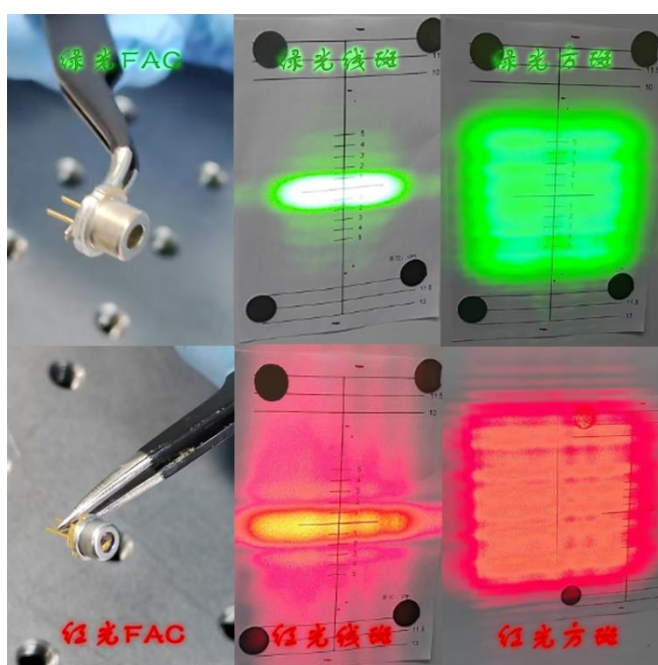
各式各样的定制准直镜筒


抖音



1688